




Shown with 9.4mm DIN – Electrical Option **HM**

Features

- Long life elastomer diaphragm
- High quality snap action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

Dimensions

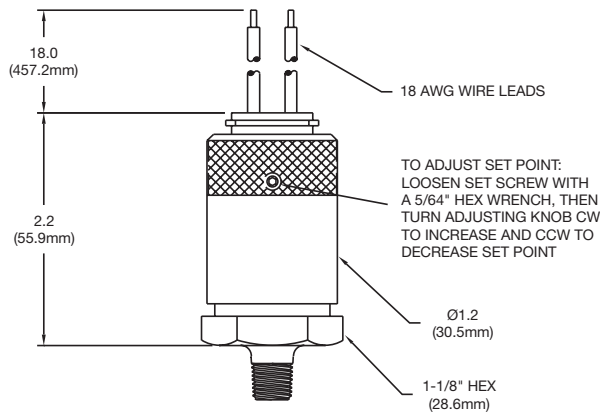

Operating Specifications

Set Point Range	3 – 120 PSI	(.21 – 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	250 PSI	(17 Bar)
Proof Pressure	750 PSI	(51 Bar)
Differential	10 – 20%	
Current Rating	3 A @ 125 VAC	
	2 A @ 30 VDC (Resistive)	
Media Connection	See Order Chart Below for Options	
Circuit Form	SPST-NO or SPST-NC	
Electrical Connection	See Order Chart Below for Options	
Diaphragm material	Buna N	
Cycle Life	1 Million	

How to Order

Example: Part Number: **CJ – 1B3 – 060J / WL**

CJ – 1 B 3 – 0 6 0 J / WL

<p>Media Connection</p> <p>1 1/4" NPT Male</p> <p>2 1/8" NPT Male</p> <p>17 1/4" BSPP Male</p> <p>28 1/8" BSPP Male</p>	<p>Circuit Form</p> <p>A SPST-NO</p> <p>B SPST-NC</p> <p>C SPDT</p>	<p>Range</p> <p>1 3 – 10 PSI</p> <p>2 6 – 30 PSI</p> <p>3 20 – 120 PSI</p>	<p>Desired Set Point</p> <p>3 – 120 PSI</p>	<p>Set Point Direction</p> <p>J Rising Adjustable</p> <p>G Falling Adjustable</p>	<p>Electrical Options</p> <p>WL Wire Leads 18"</p> <p>WP Weather Pack</p> <p>HM 9.4mm DIN</p> <p>MP Metri-Pack</p> <p>AU Gold Plate/Alloy for low currents</p>
--	---	--	---	--	--

Refer to the optional specifications and media connection designations charts for pressure and vacuum switches for additional options available on this model.