




Features

- Utilizes snap disc approach to sense temperature
- High quality snap action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Dimensions

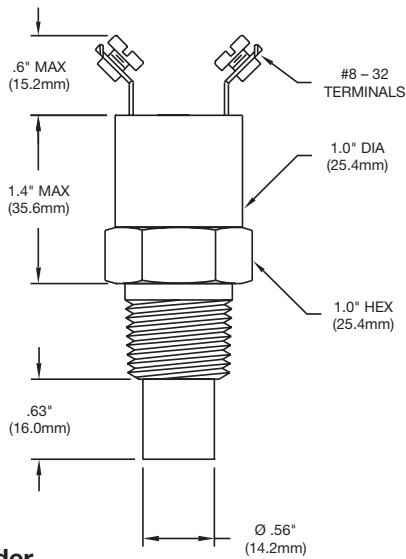

How to Order

Example: Part Number: **TD - 1C - 175R / WP**

| | | | |
|--|---|--|---|
| TD - 1 C - 1 7 5 R / WP * | | | |
| <p>Media Connection</p> <ul style="list-style-type: none"> 1 1/2" NPT Male 2 3/8" NPT Male 5 3/4" SAE O-Ring (-8) | <p>Circuit Form</p> <ul style="list-style-type: none"> A SPST-NO B SPST-NC C SPDT | <p>Fixed Set Point</p> <p>150°F - 300°F</p> | <p>Set Point Direction</p> <ul style="list-style-type: none"> R Rising F Falling |
| <p>Electrical Options</p> <ul style="list-style-type: none"> QC 1/4" Spade Connection WL Wire Leads 18" WP Weather Pack HR DIN43650A Connector MP Metri-Pack WD Deutsch AT 10 A @ 125/250 VAC 5 A @ 30 VDC GG Internal Ground AU Gold Plate/Alloy for low currents | | | |
| <p>* Defaults to Screw Terminals</p> | | | |

Refer to the optional specifications and media connection designations charts for temperature switches for additional options available on this model.